




ALFAPRSCH

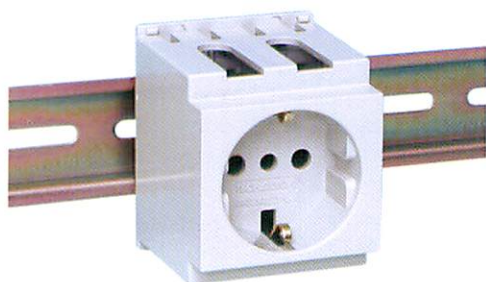


DIN RAIL SOCKET

Cost-effective Schuko socket for DIN rail mounting.

Features	Unit	
Rated voltage, max	V	250
Maximum current	A	16
Dimensions HxWxD	mm	70x53x60
Weight	kg	0,04
Conformity	-	CE

ALFATASC




WIRING DIAGRAM HOLDER

Suitable for holding documents max. A4 format (297x210 mm).

Clean carefully the mounting surface and wait at least 12 hr. before loading.

Features	Unit	
Material	-	ABS
Color	-	RAL 7032 or 7035
Fixing	-	bi-adhesive tape
Dimensions HxWxD	mm	264x235x35
Weight	kg	0,185
Conformity	-	CE

PRESSCOMP

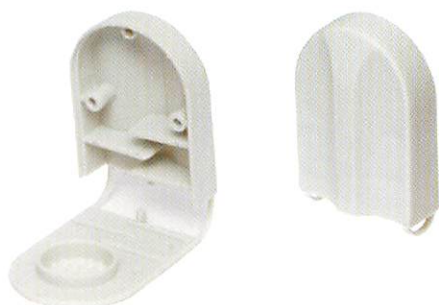


PRESSURE EQUALIZER

Sealed enclosures when subject to external temperature fluctuations develop pressure differential toward the ambient. As a consequence entrance of dust and/or humidity is likely to happen through leakage points. Installing a PRESSCOMP prevents this risk while preserving a high protection degree for the enclosure.

Features	Unit	
Material	-	ABS self-extinguishing RAL 7035
Protection degree	-	IP45
Fixing	-	screws with rubber gasket
Dimensions HxWxD	mm	70x50x21
Weight	kg	0,022
Conformity	-	CE

GUIDADINPL

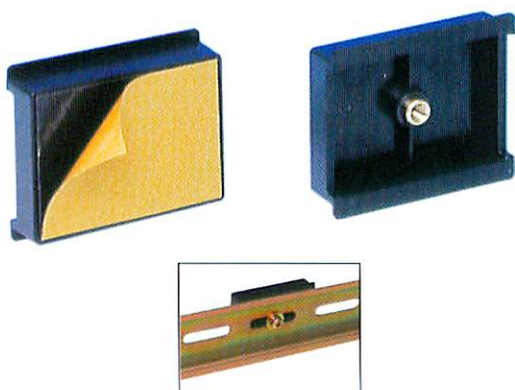

FIXING DEVICE

A practical solution for mounting small devices or DIN 35 mm rail without the necessity of drilling holes on the cabinet. The double-sided adhesive band can bear a continuous load of 0,5 kg. Before fixing, clean carefully the mounting surface and wait at least 24hr before loading.

Features	Unit	
Material	-	ABS self-extinguishing Black
Maximum load	kg	0,5
Application temperature	°C	+ 10 min.
Operating temperature	°C	-30 + 70
Mounting surfaces	-	all, except poly-ethylene, poly-propylene and rubber
Dimensions HxWxD	mm	42x36x11
Weight	kg	0,015
Conformity	-	CE