


"GF15K BE" SERIES FAN FILTERS

Description: **Fan Filter 115/230 Va.c.**






Type of material: ABS/PC alloy
Standard color: RAL 7035 - other colors on request
Protection degree: IP54, according to EN 60529 standard
Fixing system: hook tightened by a screw (torque wrench setting 0.5 Nm)
Plate thickness: up to 8 mm and up to 16 mm by cutting the jacks
Storage temperature: from -40°C to +70°C
Lifetime L10 at 40°C: 45,000 h
Motor protection: thermal
Electrical connection: by terminal block 3 poles L-N-PE
Earth connection: (by terminal block, PE pole)
Appliance class: class I
Type of filter media: thermo-linked progressive structure synthetic fibre
Filtering class: class G3, according to EN 779
Degree of separation: 85% - DIN 24185
Dust retention capacity: 600 g/m²
Note: filter media is washable for about 10 times
Weight: 1.7 Kg
Approvals: CE

technical drawing

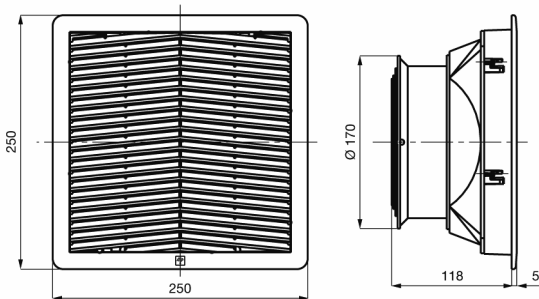

mounting cut-out

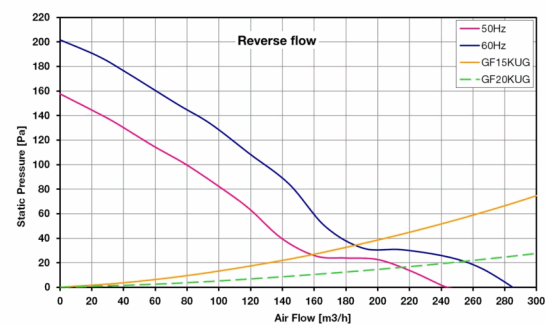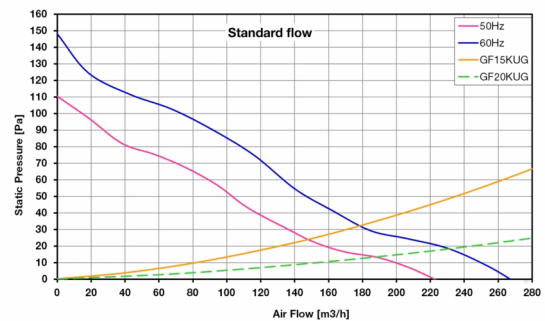

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m ³ /h)	Static Pressure (Pa)	Fan Noise [db(A)]	Rated Temp. Range (°C)	Approvals
GF15KU115BE	115 V a.c.	50/60	0.28/0.30	32/35	224/270	110/148	50.0/55.0	-10 + +50	CE
GF15KU230BE	230 V a.c.	50/60	0.14/0.15	32/34	224/270	110/148	50.0/55.0	-10 + +50	CE
GF15KU230BER	230 V a.c.	50/60	0.14/0.15	32/35	248/290	158/202	50.0/55.0	-10 + +50	CE

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.