


"GF15KP" SERIES FAN FILTERS


Description: Fan Filter 115/230 Va.c.




technical drawing

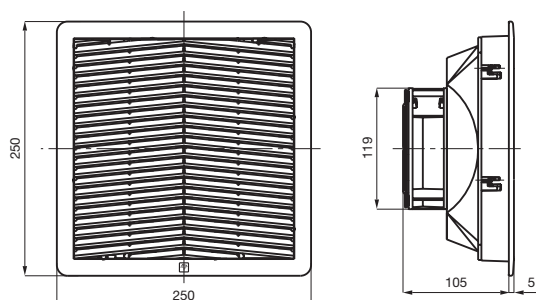

mounting cut-out



Type of material:	ABS/PC alloy
Standard colour:	RAL 7035 - other colors on request
Protection degree:	IP54, according to EN 60529 standard
Fixing system:	hook tightened by a screw (torque wrench setting 0.5 Nm)
Plate thickness:	up to 8 mm and up to 16 mm by cutting the jacks
Storage temperature:	from -45°C to +75°C
Motor lifetime	
L10 at 40°C (approx.):	45,000 h
Motor protection:	impedance
Electrical connection:	by terminal block 3 poles L-N-PE
Earth connection:	(by terminal block, PE pole)
Appliance class:	class I
Type of filter media:	thermo-linked progressive structure synthetic fibre
Filtering class:	class G3, according to EN 779
Degree of separation:	85% - DIN 24185
Dust retention capacity:	600 g/m ²
Note:	filter media is washable for about 10 times
Weight:	1.39 Kg
Approvals:	CE

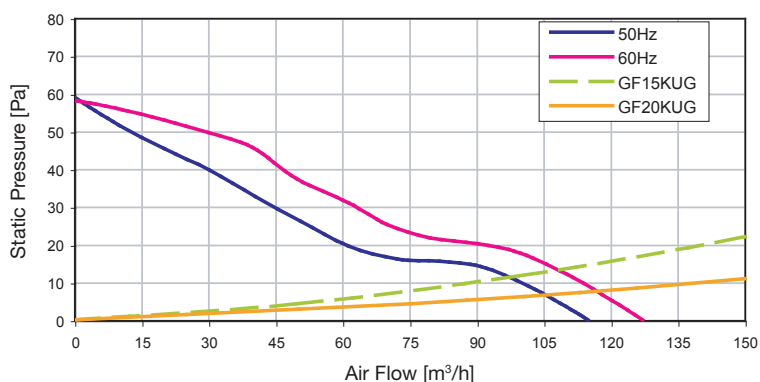

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow (*)	Static Pressure	Noise	Rated Temp. Range
	(V)	(Hz)	(mA)	(W)	(m³/h)	(Pa)	[dB(A)]	(°C)
GF15KPU115BE	115 a.c.	50/60	205/180	17/15	115/127	59/58	43/48	-10 ~ +55
GF15KPU230BE	230 a.c.	50/60	94/86	17/15	115/127	59/58	43/48	-10 ~ +55

(*) data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate.
Please refer to our terms of sales including our warranty and limited liabilities clauses.